

DLG-L5

- Soluzione LED compatta certificata UL
- 5W, 400 Lm, 6500° K, vita operativa > 60'000 h, temperatura di utilizzo -40° + 60° C
- Connessione mediante doppio morsetto a pressione o spina 2 poli
- Fissaggio a vite su squadrette con piega 120° o magnetico
- Le clip di tenuta permettono di ruotare la lampada di 120° a seconda della necessità



- *Compact LED solution UL listed*
- *5W, 400 Lm, 6500° K, lifespan > 60'000 hrs, operating temperature -40° + 60°C*
- *Connection by dual pressure clamp or 2 poles connector*
- *Magnetic or screw fixing by 120° angled brackets*
- *Clips holders provide 120° lamp rotation depending on lighting needs*






doppio morsetto a pressione
dual pressure clamp



spina 2 poli
2 poles connector

IP20

codice code	connessione connection	tensione voltage	accensione ignition	fissaggio mounting
DLG-L5-2540.313	2 morsetti doppi a pressione	100-240Vac/90-110Vdc	interruttore on/off - on/off switch	vite - screw
DLG-L5-2541.313		100-240Vac/90-110Vdc	sensore - movement sensor	
DLG-L5-2542.313F		100-240Vac/90-110Vdc	micro - door switch	
DLG-L5-2540.113		24-48Vdc	interruttore on/off - on/off switch	
DLG-L5-2541.113		24-48Vdc	sensore - movement sensor	
DLG-L5-2542.113F		24-48Vdc	micro - door switch	
L5-2540.310	2 dual pressure clamp	100-240Vac/90-110Vdc	interruttore on/off - on/off switch	magnetico - magnetic
L5-2541.310		100-240Vac/90-110Vdc	sensore - movement sensor	
L5-2540.110		24-48Vdc	interruttore on/off - on/off switch	
L5-2541.110		24-48Vdc	sensore - movement sensor	
DLG-L5-2540.001	Spina 2 poli 2 poles connector	100-240Vac	interruttore on/off - on/off switch	vite - screw
DLG-L5-2540.001F		100-240Vac	micro - door switch	
DLG-L5-2540.101		24-48Vdc	interruttore on/off - on/off switch	
DLG-L5-2540.101F		24-48Vdc	micro - door switch	

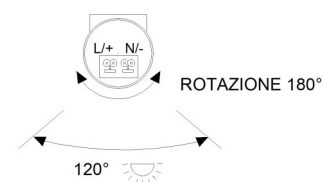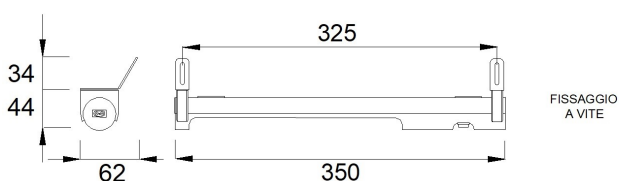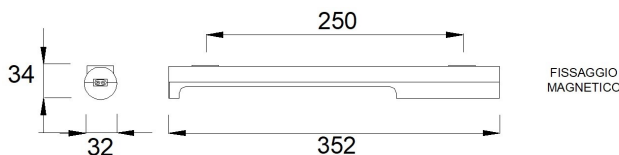

UL file nr. E234324