





- Adatti al montaggio su portella degli armadi
- Connessione tramite morsetto a vite o faston
- Vita >100'000 ore a 25°C
- Temperatura operativa -25 +60 °C
- Etichette personalizzabili
- Ampia gamma di colori led (ROSSO, GIALLO, BLU, VERDE, ARANCIO, BIANCO)



STT30

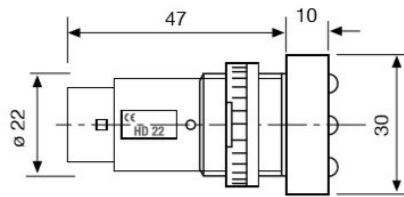

- Suitable for cabinet door mounting
- Connection by screw or faston terminal
- Lifespan >100'000 hrs at 25°C
- Operating temperature -25 +60 °C
- Custom labels
- Wide led color array (RED, YELLOW, BLUE, GREEN, ORANGE, WHITE)

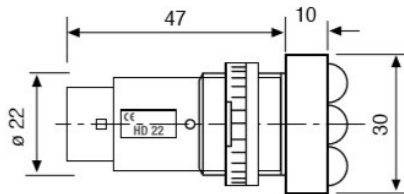

STTH30




**Compliance:**

Directive 2006/95/EC Low Voltage  
 Directive 2004/108/EC Electromagnetic  
 Compatibility Directive 2011/65/EC RhOS  
 Directive 2006/42/EC Machinery

**Conformity to standards:**

EN 60947.5.1 / EN 60073 / EN 60529 / EN 60068-2-6 /  
 EN 60204.1 / EN ISO 7731 / EN 981 / IEC 536

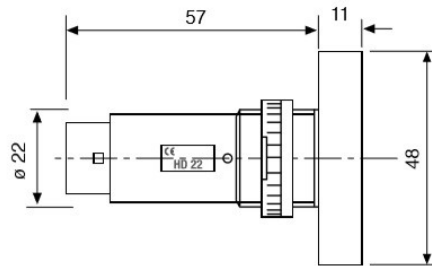

STT48



	alimentazione power supply V	assorbimento consumption mA	dimensione led led dimension mm	testa head mm	connessione connection	peso weight kg
<b>STT23</b>	380-400Vac	15	Ø 5	30x30	morsetti/screw	0.23
<b>STTH23</b>	380-400Vac	15	Ø 10	30x30	morsetti/screw	0.20
<b>STT48</b>	380-400Vac	15	8x8	48x48	morsetti/screw	0.37
<b>STTF23</b>	380-400Vac	15	Ø 5	30x30	faston	0.23
<b>STTHF23</b>	380-400Vac	15	Ø 10	30x30	faston	0.20
<b>STTF48</b>	380-400Vac	15	8x8	48x48	faston	0.37

altre alimentazioni disponibili su richiesta - more voltages available on request