

Cassette di comando in alluminio con fori diametro 22mm predisposte all'uso di comandi, selettori e segnalatori.

Fissaggio tramite fori esterni al perimetro di tenuta della guarnizione.

Viti del coperchio in acciaio inox . Viti antimanomissione a richiesta.

Guarnizioni in mouse al neoprene .

grado di protezione IP65

temperatura di impiego -20 +100°C

Enclosures in aluminium alloy for control and switches. They can be used for control, selectors and switches which can be used in 22 mm diameter hole.


The enclosures can be fixed by means of holes outside the gasketed perimeter.

Stainless steel cover screws. Unscrewable screws on request.

Neoprene mouse gasketed.

IP65 protection degree.

Temperature of use -20 + 100°C.

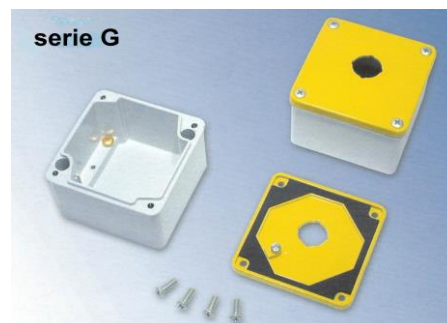

codice-code	A	B	H	n. fori - n. hole	finitura - finishing
G085A54	91	91	61	1	sabbiata - sandblasted
G085A54X	91	91	61	1	RAL7035
G085A54Y	91	91	61	1	con cop. Giallo - with yellow cover
G100A74	106	106	81	1	sabbiata - sandblasted
G100A74X	106	106	81	1	RAL7035
G100A74Y	106	106	81	1	con cop. Giallo - with yellow cover
G100B74	106	106	81	2	sabbiata - sandblasted
G100B74X	106	106	81	2	RAL7035
G120B68	126	78,5	75	2	sabbiata - sandblasted
G120B68X	126	78,5	75	2	RAL7035
G150D74	156	106	81	4	sabbiata - sandblasted
G150D74X	156	106	81	4	RAL7035
G200C74	206	106	81	3	sabbiata - sandblasted
G200C74X	206	106	81	3	RAL7035
G200F74	206	106	81	6	sabbiata - sandblasted
G200F74X	206	106	81	6	RAL7035
G250D68	256	91	75	4	sabbiata - sandblasted
G250D68X	256	91	75	4	RAL7035
G250E68	256	91	75	5	sabbiata - sandblasted
G250E68X	256	91	75	5	RAL7035
G260H84	268	133	91	8	sabbiata - sandblasted
G260H84X	268	133	91	8	RAL7035
G260N84	268	133	91	12	sabbiata - sandblasted
G260N84X	268	133	91	12	RAL7035